




F21T 92-25A

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Wide air storage for a high speed

STAPLE TYPE

BeA 92, Atro 92, Bostitch SL5035, Kihlberg 664

TOOL TYPE



21T 92-25A

TOOL CHARACTERISTICS


Height	Width	Length	Weight
216 mm	49 mm	228 mm	1.18 kg
8.50 inch	1.93 inch	8.98 inch	2.60 lbs

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.43 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

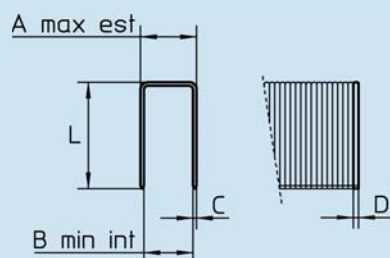

A) Outside Crown	8.90 mm	0.350 inch
B) Inside Crown	6.40 mm	0.252 inch
CxD) Wire	1.00 x 1.25 mm	0.039 x 0.049 inch
L) Length	10 - 25 mm	3/8 - 1 inch
Magazine Capacity	110 staples	
Staple Type	BeA 92, Atro 92, Bostitch SL5035, Kihlberg 664	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 97.20 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 90.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by
UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 4
(Safety : CT)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- mouldings and decorative trims
- TV and HI-FI screens
- vehicle panels
- upholstery
- baseboards
- manufactured houses
- labelling
- drawer guides
- boat interiors
- picture frames
- underlayment
- case backs
- trade shows
- remodelling
- fruit cases
- frame assembly
- shoe making
- dust covers
- sofas
- panels and profile boards
- toys and dolls

FASCO S.R.L. Italy

Via B. Buoizzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-tools.com | www.fasco-tools.com

FASCO
AIR DRIVEN TOOLS

MEMBER OF THE
beck
FASTENER GROUP