



Rugged Design  
Professional Quality  
Proven Performance  
Economically Priced

**The Profitable Source  
for Finishing Products**

## **Gfp 800DH Series**

### **Professional Dual Heat Laminators**

For finishing professionals who need versatility, quality, and economy in one machine, the Gfp 800 Series delivers. Turn out thermal encapsulation with low melt films (1.5-10mil), PSA lamination, and mounting jobs quickly and easily.

### **800DH Series**

#### **ULTIMATE FLEXIBILITY**

*Dual heat for thermal & cold apps*

#### **PROFESSIONAL FEATURES**

*Produce Professional results*

#### **FAST ROLL CHANGES**

*Front/Rear Swing-out shafts*

#### **EASY LOADING**

*3" Quick-Grip Swing-out Shafts*

#### **INDUSTRIAL DESIGN**

*Years of maintenance-free service*




***laminating • mounting • encapsulating***

***Our most flexible, cost-effective laminator yet***

Spend less time on set-ups and changeovers with swing-out Quick-Grip supply shafts. Two front rewind shafts allow thermal encapsulation of prints from a roll.



- **Labor saving swing-out 3" Quick-Grip supply shafts**
- **Photoelectric eye for operator safety**
- **Independent top and bottom heaters**
- **Web clutch adjustment for output quality**
- **Optional motorized rear rewind**
- **Swing up feed table and 38" output height**

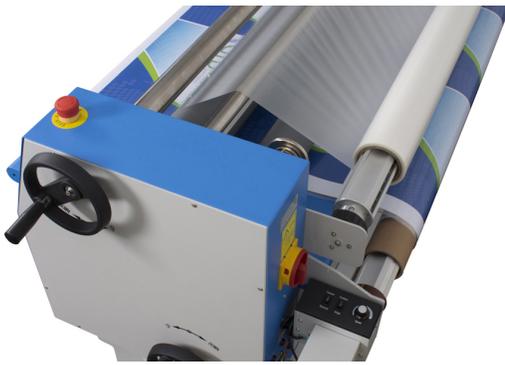

Motorized rear rewind  
for roll-to-roll  
applications

Front and rear swing-  
out film shafts for  
easy loading



## APPLICATIONS

Signs  
Posters  
POP Displays  
Trade show displays  
Dry-erase boards  
Graphic mounting  
Photo mounting  
Floor graphics  
Window graphics  
Vehicle graphics

cTUVus  
Safety  
Approval



## Warranty:

1 year parts & labor.  
Installation is included.

## 847DH-1

## 865DH-1

<i>Laminating Width</i>	47"	65"
<i>Roller Diameter</i>	5"	
<i>Roller Gap</i>	1"	
<i>Main rollers</i>	Silicone	
<i>Supply roll diameter(max)</i>	16" bottom, 8" top	
<i>Film shafts</i>	3" aluminum Quick-Grip	
<i>Rear rewind</i>	Optional	
<i>Max. temperature</i>	266°F	
<i>Heat method</i>	Quartz heater	
<i>Film thickness</i>	1.5 - 10mil	
<i>Laminating speed</i>	0-13 ft/min	
<i>Drive motor</i>	DC geared motor	
<i>Pressure Adjustment</i>	Dual hand wheels	
<i>Roller heating</i>	Top & Bottom	
<i>Power Supply</i>	Single phase 19A 220v 60HZ	Single phase 24A
<i>Power Consumption</i>	Max. 4400W	Max. 5700W
<i>Net Weight w/ stand</i>	601 lbs.	767 lbs.
<i>Dimensions</i>	69" x 34" x 49"	87" x 34" x 49"
<i>Machine shipping</i>	685 lbs. 77" x 38" x 33"	893 lbs. 90 x 38" x 33"
<i>Stand shipping</i>	115 lbs. 61" x 33" x 15	134 lbs. 79 x 33" x 15"

Your local dealer is:

