

GreenleafLED[®] MARQUEE

Installation Manual for Awning Fixture


IMPORTANT INSTALLATION INSTRUCTIONS

⚠ WARNING ⚠


TO REDUCE THE RISK OF DEATH, SEVERE INJURY, OR EQUIPMENT FAILURE, REVIEW THESE INSTALLATION SAFETY STEPS BEFORE PROCEEDING.

1. Read and follow all installation instructions.
2. Always confirm power is off at circuit breaker before working with electrical wiring.
3. Fixture must always be installed in accordance with local electrical code.
4. Never overload circuit.
5. Always ensure that fixture is grounded.


In the box:




Awning fixture



Mounting clips (2)




Fixing screws (2)




Anchors (4)



Mounting screws (4)




End cap



Series connector


Mounting Instructions:

1




Attach mounting clips (B) with appropriate hardware. For included anchors (D) and screws (E), drill a 6mm hole.

2

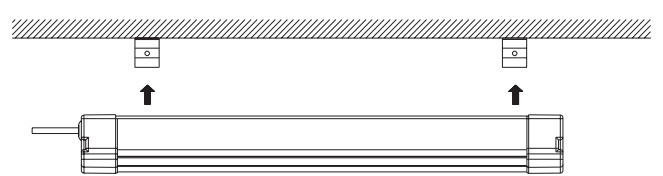


Set fixture (A) to mounting clips (B)

3

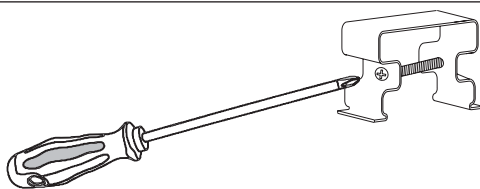

Tighten mounting clips (B) using fixing screws (C)

4

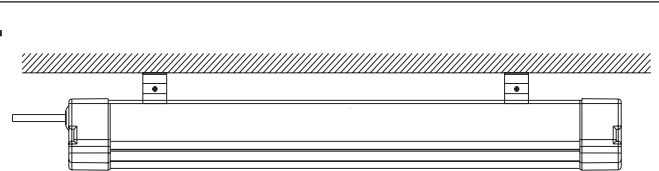

Final result

Electrical Information:

ALWAYS SWITCH POWER OFF AT CIRCUIT BREAKER BEFORE BEGINNING WORK.

Power cable terminates using black for Line, white for Neutral, and green for Ground.

When installing single unit, or the last in a series, ensure that the end cap (F) is tightly applied.

When installing multiple units in series, do not exceed maximum wattage listed in table.

When installing in series, connect to prior unit using included series connector (G).

MAX UNITS IN SERIES	100V	200V	277V
GLMAF4 (50W)	12	26	33
GLMAF8 (100W)	6	13	16