

SPS/SPS-C Series Waterproof IP64,UL



40W~90W

12V

Model Specifications



Size: 350×60×40mm
Power: 40W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-40-12	12VDC	3.33A



Size: 390×60×40mm
Power: 60W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-60-12	12VDC	5.0A



Size: 440×60×40mm
Power: 90W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-90-12	12VDC	7.5A



Size: 157×60×40mm
Power: 40W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-40-12-C	12VDC	3.33A



Size: 200×60×40mm
Power: 60W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-60-12-C	12VDC	5.0A



Size: 250×60×40mm
Power: 90W
Input: 120VAC/60Hz

Model No.	Output Voltage	Output Current
SPS-90-12-C	12VDC	7.5A

■ Features

Class 2 AC to DC Single Output Switching Power Supply.

Self-contained slim design, wiring connection inside.

UL recognized outdoor class I.

IP64 rating.

Operating, full load ----- $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Storage ----- $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$



Relative humidity----- 5% to 95% RH

Wet Location Use - Case with Conduit Option only

■ Applications

LED Signage / LED Architectural Lighting / LED Industrial Lighting / LED Sports Lighting / LED Cobra Head Lighting.

■ Derating Curve

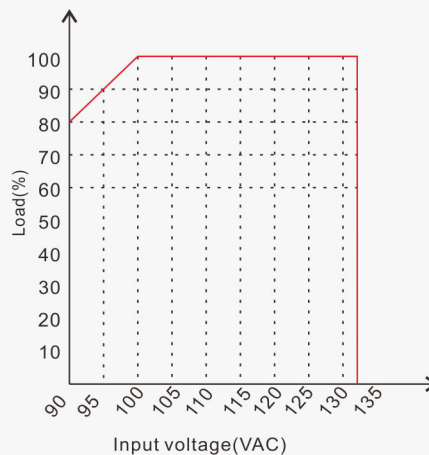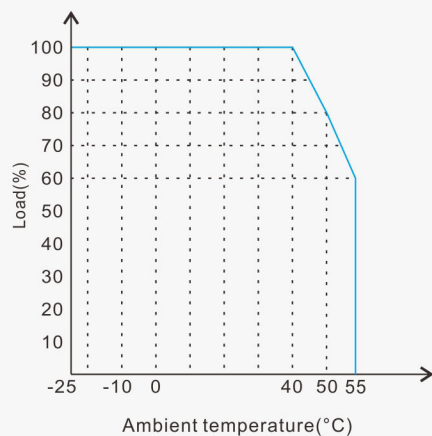

■ Wiring Diagram

