


VT4015-12F

Use with Ventex AC Adapter.

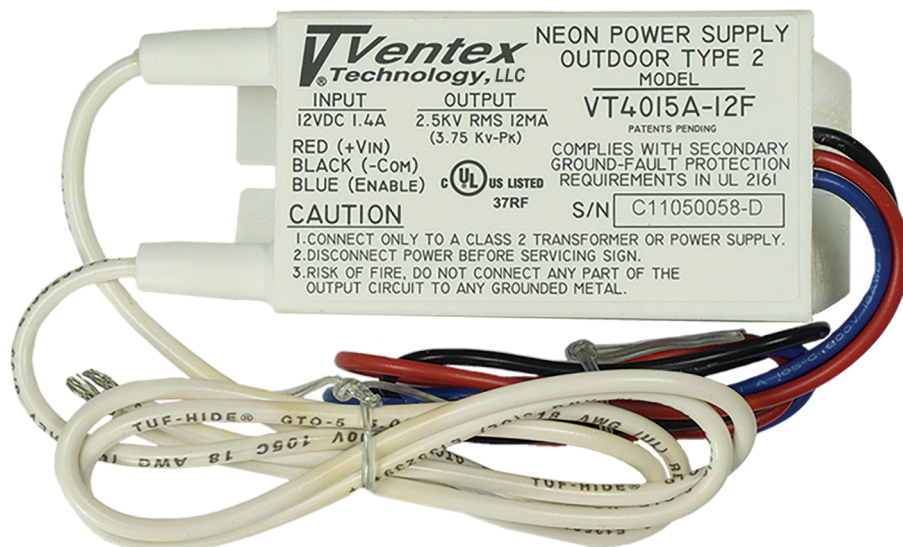

FEATURES AND BENEFITS


- UL and cUL listed to UL 2161
- Small size and lightweight
- Low-voltage input
- Use standard gas pressure
- Indoor or outdoor operation

SPECIFICATIONS

Input Voltage	11 to 14VDC
Input Current	1,400A rms at full load
Output Voltage	0V-4,000V
Output Current	15mA
Operating Temp	32°F to 104°F / 0°C to 40°C
Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for additional pair of electrodes.)	
Neon	0.5-12 ft (0.15-3.6 m)
Mercury	0.5-10 ft (0.15-3.0 m)

*See Ventex Luminous Tube Footage Chart for more information.

Length (A)	3.80 in	9.7 cm
Width (B)	1.85 in	4.6 cm
Height (C)	1.30 in	3.3 cm
Mounting (D)	3.50 in	8.9 cm
Mounting (E)	0.90 in	2.3 cm
Weight	9.0 oz	255 g
Primary Leads	8.0 in	20.3 cm
GTO Leads	18.0 in	45.7 cm

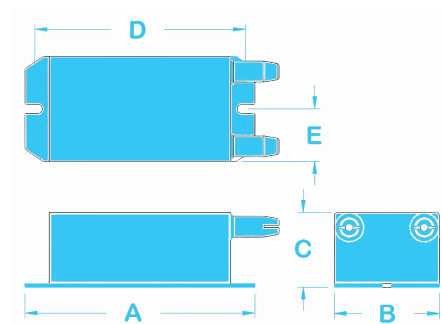

Male connector to mate with wall adapter power supply. **Ventex AC Adapter is found on page 72 of this catalog. VT-DF01 Dimmer/Flasher no longer available.

