

VT6030-120



FEATURES AND BENEFITS


- Pull-chain on/off switch
- Unit will not trip on capacitive currents up to 15mA
- Line load regulated (30mA self-adjusting output regardless of load size or input voltage fluctuations)
- Sign grounding connection via mounting foot and plug
- UL 2161 listed
- 32" GTO leads
- Complies with CSA22.2, No. 107.1, No. 13
- High power factor
- Open circuit and overload will shut unit down
- Ten-foot power cord (3 Pin)

SPECIFICATIONS

Input Voltage	120VAC (+/-10%) 50/60 Hz
Input Current	0.6A rms max.
Power Factor	.95
Output Frequency	Variable
Output Voltage	0V-6,000V
Output Current	30mA
Operating Temperature	32°F to 104°F / 0°C to 40°C
Driving Distance* (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.)	
Neon	3-16 ft (1-4.9 m)
Mercury	3-19 ft (1-5.8 m)

*See Ventex Luminous Tube Footage Chart for more information.

Length (A)	6.50 in	16.5 cm
Width (B)	2.05 in	5.2 cm
Height (C)	1.45 in	3.7 cm
Mounting (D)	6.0 in	15.2 cm
Mounting (E)	1.03 in	2.6 cm
Weight	24.0 oz	680 g
Power Cord	10.0 ft	3.0 m
GTO Leads	32.0 in	81.3 cm

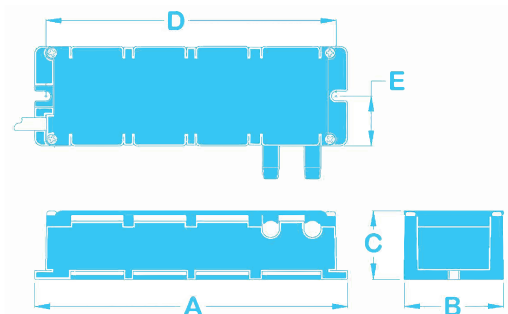

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646

