

VT9030D-120

Three level dimming* 100%, 75%, 50%



FEATURES AND BENEFITS

- 32" GTO leads
- Pull-chain on/off switch
- Unit will not trip on capacitive currents up to 15mA
- Line load regulated (30mA self-adjusting output regardless of load size or input voltage fluctuations)
- Sign grounding connection via mounting foot
- Ten-foot power cord (3 Pin)
- UL 2161 listed
- Complies with CSA22.2, No. 107.1, No. 13
- High power factor
- Special bulk with special 18 feet IEC Connector
- Open circuit overload will shut unit down

NOTE: Under a fault condition, unit will attempt to reset two more times then latch off permanently unless the fault clears. Intermittent faults will not affect the operation of the unit.

SPECIFICATIONS


Input Voltage	120VAC (+/-10%) 50/60 Hz
Input Current	0.9A rms
Power Factor	.95
Output Frequency	Variable
Output Voltage	0V-9,000V
Output Current	30mA (3 Level Dimming*)
Operating Temperature	32°F to 104°F / 0°C to 40°C
Driving Distance** (Based on Standard 12mm tube. Deduct one foot from driving footages for each pair of electrodes.)	
Neon	4-26 ft (1.2-7.9 m)
Mercury	4-31 ft (1.2-9.4 m)

*3-position switch on top of unit sets light output to three different levels

**See Ventex Luminous Tube Footage Chart for more information.

DIMENSIONS

Length (A)	6.50 in	16.5 cm
Width (B)	3.15 in	8.0 cm
Height (C)	1.55 in	3.9 cm
Mounting (D)	6.0 in	15.2 cm
Mounting (E)	2.25 in	5.7 cm
Weight	30 oz	850 g
Power Cord	10.0 ft	3.0 m
GTO Leads	32.0 in	81.3 cm

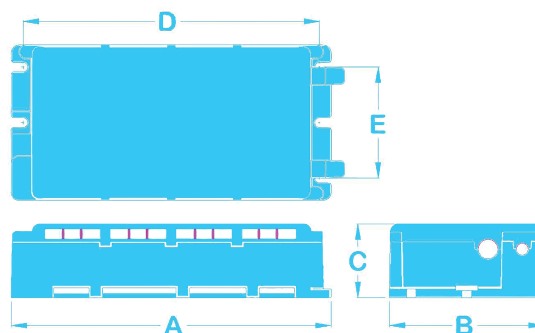

Exclusive: These units are protected by Ventex's patented protective circuitry to prevent false tripping due to capacitive current. Patent #5892646

