

We BRIGHTEN Your BRANDS

VL Plus 2 Whites

Everyday standard face lit solutions

- VL Plus 2 is 25% brighter than VL Plus
- **NEW** VL Plus 2 HB Short is 28% brighter than VL Plus 2 Short
- Short available in 5 shades of white
- Constant Current Technology (CCT)

SPECIFICATIONS

Part number	Long	6500 K	701269-6WLA2-MB
	Short	7200 K	701269-7WSA2-MB
		6500 K	701269-6WSA2-MB
		5000 K	701269-5WSA2-MB
		4000 K	701269-4WSA2-MB
		3000 K	701269-3WSA2-MB
	HB Short	6500 K	701269-6WHA1-MB
	Mini	6500 K	701269-6WMA2-MB

Dimensions L × W × H	Long	3.45 in × 0.49 in × 0.35 in
	Short	2.35 in × 0.49 in × 0.35 in
	Mini	1.33 in × 0.44 in × 0.35 in

Viewing angle 120°

LEDs per module	Long/Short	3
	Mini	2

Modules per foot	Long	2
	Short	2.5
	Mini	4

Maximum coverage per row	Can depth	5 in
	Coverage	5 in

Operating temperature -40° C to +70° C


Protection class IP66

SloanLED Headquarters
5725 Olivas Park Drive • Ventura, California 93003
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Overslagweg 7 • 2645 EK Delfgauw • The Netherlands
+31 88 12 44 900 • Europe@SloanLED.com

SloanLED.com

© 2016 SloanLED Rev C 2016-03-22

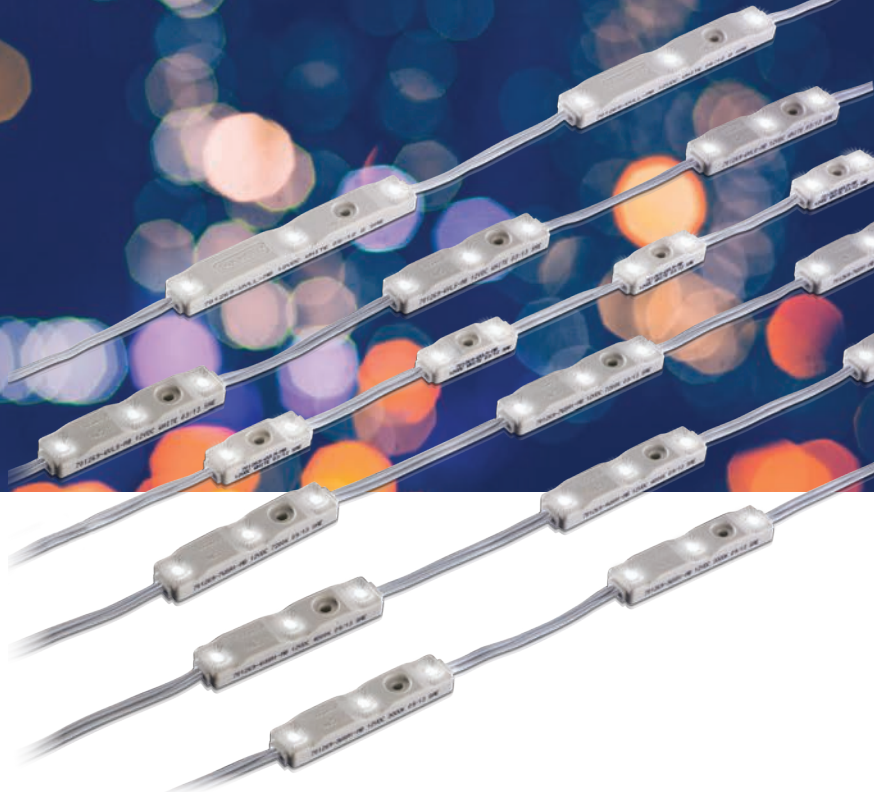

Power per module	Long/Short	0.54 W
	Mini	0.42 W
Efficacy	Long/Short	93 lm/W
	HB Short	119 lm/W
	Mini	60 lm/W
Power capacity	Per SloanLED 60 W 12 VDC power supply:	
	Long/short	100 modules
	Mini	128 modules
Fastening	Peel-n-stick and mechanical	
Packaging	5 trays per carton	
	Long	25 ft (50 modules) per tray
	Short	30 ft (75 modules) per tray
	Mini	25 ft (100 modules) per tray

Size	Color temperature	Part number	Lumens per module (nominal)
Long	6500 K	701269-6WLA2-MB	50
	7200 K	701269-7WSA2-MB	50
Short	6500 K	701269-6WSA2-MB	50
	5000 K	701269-5WSA2-MB	50
	4000 K	701269-4WSA2-MB	50
	3000 K	701269-3WSA2-MB	50
	6500 K	701269-6WHA1-MB	64
HB Short	6500 K	701269-6WHA1-MB	64
Mini	6500 K	701269-6WMA2-MB	25



SloanLED channel letter products are covered by US and foreign patents pending and covered by one or more of the following US patents issued: 6,932,495, 7,160,140, 7,241,031, 7,520,771, 7,931,386 and European Patent No. 1756471

