

FRANCE

LIGHTING SIGNS FOR OVER A CENTURY



Excellent Reliability, Quality, Warranty

800-793-4793 | www.sfeg.com

LED-1260MMPS



FRANCE COMPACT

60W 12V CLASS 2

LED POWER SUPPLY



SPECIFICATIONS

Size

7.20" Long x 1.97" Wide x 1.42" Tall
Including Baseplate, 2 lbs

Ambient Operating Temperature

-30°C to 60°C

Input

120-277VAC, 50/60Hz, 1.2/.70 Amp Max

Output

12VDC, 5 Amp, 60 Watt, Class 2
No Minimum Loading Requirement

Lead Length

12" Input and Output

Environment

IP67, For Use in Damp or Dry Locations
UL Listed Class P
FCC Part 15 Class B Residential or Commercial

Warranty

5 Year France LED Warranty

A Fusion of Performance, Quality, Compact Size, and Value

Compact Size

Low profile, fully potted construction provides maximum durability

Tru-Power™ Rated

Designed to operate reliably at full rated power at maximum rated ambient temperature - No need to de-rate like other competing products

Overload Protection Shut Down

Unit blinks LEDs when significantly overloaded
Integrated short circuit protection with automatic reset

High Electrical Efficiency

Low energy costs and cool operation in a small package
85° maximum case temperature

For more information, contact
your France distributor or email
us at sales@sfeg.com

800 - 793 - 4793


www.sfeg.com

2268 Fairview Blvd, Fairview, TN, 37062

LED-1260MMPS 60 Watt 12V Class P LED Power Supply

Electrical Specification

Input Voltage	120VAC 277VAC	Output Voltage	12VDC
Input Frequency	50/60 Hz	Rated Output Current	5.0 Amps
Max Input Current	1.2A .70A	Rated Output Power	60 Watts

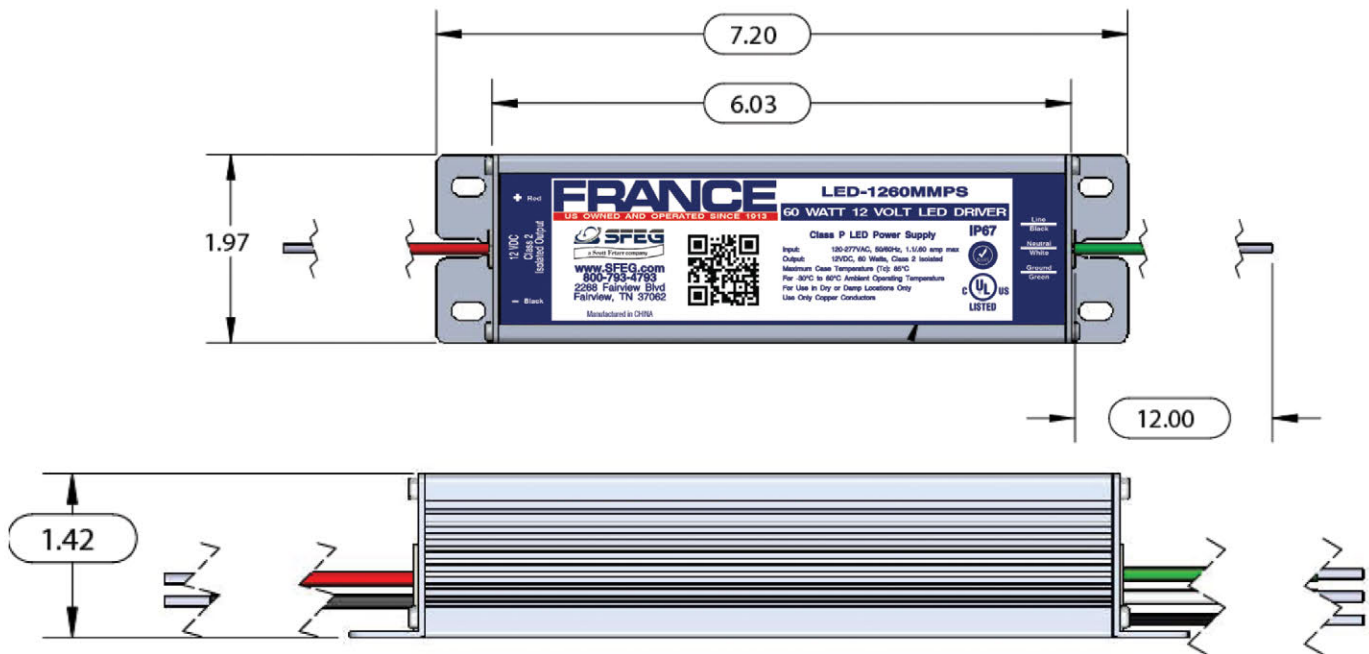

Check out our other LED Products



LED-1260WMPS

60W 12V Class 2 LED Power Supply
For use in Wet, Dry, or Damp locations
Excellent thermal characteristic and overload protection
UL Class P Listed
France 5 year warranty

LED Fast-Pak™ Kits

Complete UL listed assemblies, pre-assembled, pre-wired and worry free.



LED Fast-Pak™

14.85" long x 5.30" wide x 3.21" in tall
Features LED-1260EPS power supply
Wet-listed enclosure



mini LED Fast-Pak™

9.71" long x 4.73" wide x 2.99" tall
Features LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure



Double mini LED Fast-Pak™

10.49" long x 8.78" wide x 2.99" tall
Features 2X LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure

For more information, contact your France distributor or email us at sales@sfeg.com