


OPTIX® DA DIGITAL ACRYLIC

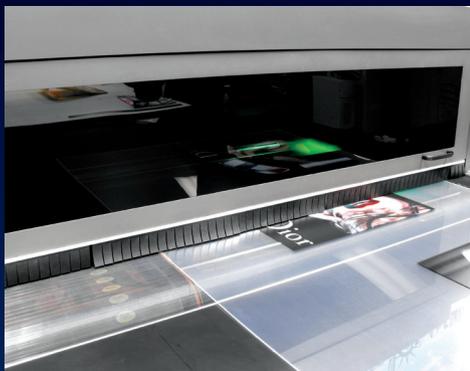

Discover an acrylic sheet that doesn't require an adhesion promoter prior to ink application.

Often, printers sacrifice the outstanding optical clarity of acrylic sheet for the good UV ink adhesion properties offered by other plastic sheet substrates.

Not anymore! Optix® DA eliminates the need for the costly and often time-consuming task of applying an adhesion promoter prior to printing. Produce high-quality, vibrantly colored prints with the UV curable inks that are utilized in today's UV digital flatbed printers.

Optix® DA Digital Acrylic Sheet

- Produced with a specially formulated acrylic polymer that promotes optimal adhesion of UV curing inks without the need for an adhesion promoter prior to ink application
- Developed and tested with a leading manufacturer of digital UV flatbed printers and various ink suppliers
- Available in clear, 7328 white and non-glare
- NEW OPTIX® E-DA, Erasable Digital Acrylic, has the same high-quality direct-to-print surface on one side as the original Optix® DA, with the added benefit of an abrasion- and chemical-resistant coating on the other. Perfect for contemporary marker board designs and applications where anti-graffiti properties are desired.

Contact Plaskolite for thickness and size availability.

OPTIX[®] Digital Clear Acrylic Sheet Properties

Physical Properties	ASTM Test Method	Units	Values
Specific Gravity	D-792		1.19
Optical Refractive Index	D-542		1.49
Light Transmittance Total Haze	D-1003	% %	92 2
Sound Transmission	E 90 E 413	db	27
Water Absorption	D-570	% By Weight	0.40
Shrinkage	D-702	% Shrinkage	<5%

Mechanical			
Tensile Strength - Max. Tensile Elongation - Max. Tensile Modulus of Elasticity	D-638	psi % psi	11,030 5.8 490,000
Flexural Strength - Max. Flexural Modulus of Elasticity	D-790	psi psi	17,000 490,000
Izod Impact Strength - Molded Notch Izod Impact Strength - Milled Notch	D-256	ft-lb/in Notch ft-lb/in Notch	0.4 0.28
Tensile Impact Strength	D-1822	ft-lb/in ²	20
Abrasion Resistance Change in Haze 0 cycles 10 cycles 50 cycles 200 cycles	D-1044	Haze, % Haze, % Haze, % Haze, %	0 11.2 24.0 24.9
Rockwell Hardness	D-785		M-95

Thermal	ASTM Test Method	Units	Values
Maximum Recommended Continuous Service Temperature		°F	170-190
Softening Temperature		°F	210-220
Melting Temperature		°F	300-315
Deflection Temperature 264 psi 66 psi	D-648	°F °F	203 207
Coefficient of Thermal Expansion -30 to 30°C	D-696	in/(in-°F) x10 ⁻⁵	3.0
Thermal Conductivity	C-177	BTU-ft/ (hr-ft ² -°F)	0.075
Flammability (Burning Rate)	D-635	in/minute	1.019
Smoke Density Rating	D-2843	%	3.4
Self-Ignition Temperature	D-1929	°F	833
Flame Spread Index Smoke Developed Index	E-84		115 550

Chemical			
Resistance to Stress - Critical Craze Stress to: Isopropyl Alcohol Lacquer Thinner Toluene Solvesso 100	ARTC modification of MIL-P-6997	psi psi psi psi	900 500 1,300 1,600

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determine the suitability of our materials and suggestions before adopting them on a commercial scale.